



Battery Swapping Cabinet

Features

- Smart battery identification controls battery status in real time
- Waterproof/heat-proof/explosion-proof/fireproof protection design
- Automatic power off when fully charged, overvoltage, overcurrent
- Fire extinguishing in single bin, isolating dangers and reducing potential safety hazards
- Support scan code payment/battery rental package settings, etc.
- Support OEM/equipment/system customization

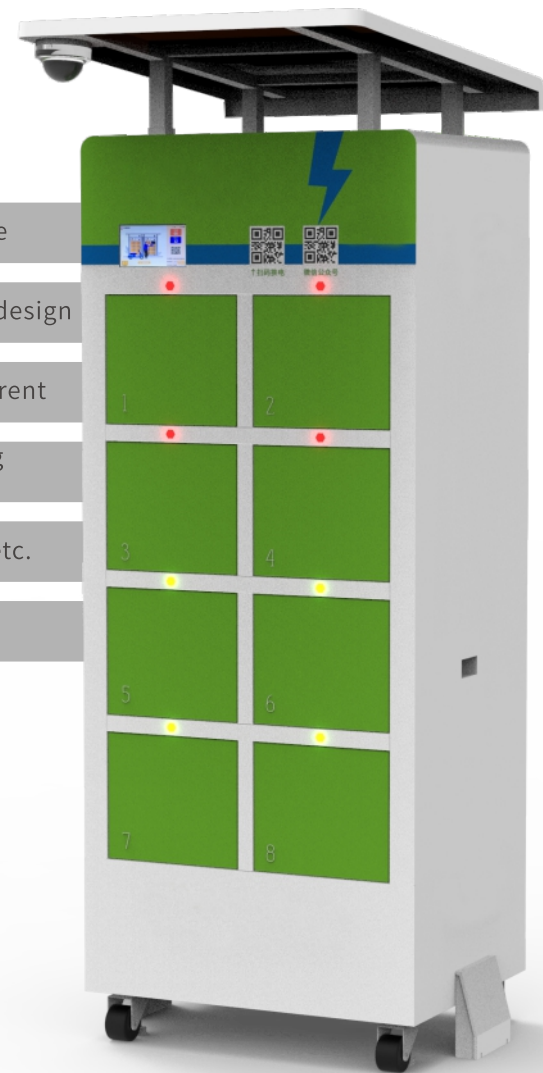

YT-ZF-6008-1

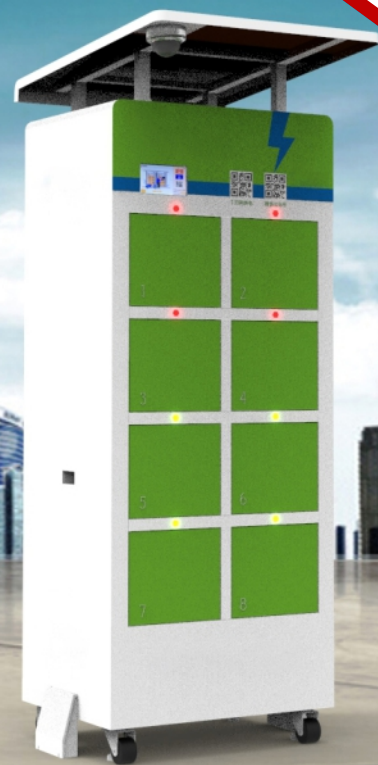

YT-ZF-6012-1



Technical Parameters

- Cabinet size: (12 bins) 1102*600*1908mm(excluding canopy)
- Bin size: 190*190*383mm
- OS: Android
- RAM: 2GB
- Display: 7-inch capacitive screen
- Serial port: 4-way RS232 standard serial port, support TTL, 1*R485
- Interface: audio interface, power amplifier interface, HDMI interface, LVDS interface
- Rated voltage: 100~240Vac
- Frequency: 50HZ
- Single bin input voltage: 176~264Vac
- Single bin output voltage: 40~72V
- Single bin input current: 4.2V
- Single bin output current: 1~10A
- Single bin power: 500W

